



Hitouch 6N

HN21N-66HT

685-705W

BIFACIAL

High Efficiency Module

22.7%

Maximum Efficiency



Long-Term Reliability

Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal).

Excellent anti-PID performance to guarantee a better sustainability in harsh environment.



Lower Hot Spot and Crack Risk

Reduce hot-spot risk with optimized electrical design and lower operating current.

Reduce crack risk by MBB solar cell design.



Higher Power Output

Higher module conversion efficiency benefit from bigger wafer and half-cell structure.


MBB technology enhances current collection with lower series resistance.



Excellent Temperature Coefficient

Lower operating temperature and temperature coefficient increases the power output.

Power Warranty

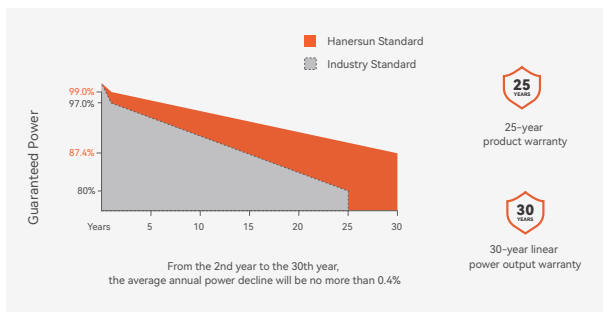

Certificates



Insurance

Munich RE

About Hanersun

Hanersun is a world-leading clean energy company, with a business scope from the R&D and intelligent manufacturing of solar modules, energy storage products, to comprehensive energy solutions.

Electrical Characteristics (STC&BNPI) HN21N-66HTXXW(XXX=685-705)

Testing Condition	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI	STC	BNPI
Maximum Power (Pmax)*	685	759	690	765	695	771	700	776	705	782
Maximum Power Voltage (Vmp)	39.80	39.80	40.00	40.00	40.20	40.20	40.40	40.40	40.60	40.60
Maximum Power Current (Imp)	17.22	19.08	17.25	19.13	17.29	19.18	17.33	19.21	17.37	19.27
Open-circuit Voltage (Voc)*	47.60	47.60	47.80	47.80	48.00	48.00	48.20	48.20	48.40	48.40
Short-circuit Current (Isc)*	18.22	20.19	18.26	20.23	18.30	20.28	18.34	20.32	18.38	20.37
Module Efficiency(%)	22.1%		22.2%		22.4%		22.5%		22.7%	

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5

BNPI: Irradiance: Front 1000W/m², Rear 135W/m², Cell Temperature 25°C, AM=1.5

*Measuring Tolerance: ±3%
Power Binning Tolerance: 0~+5W

Electrical characteristics with different power bin (reference to 10% backside power gain)

Module Type	685W	690W	695W	700W	705W
Maximum Power (Pmax)	754	759	765	770	776
Maximum Power Voltage (Vmp)	39.80	40.00	40.20	40.40	40.60
Maximum Power Current (Imp)	18.95	18.98	19.02	19.07	19.11
Open-circuit Voltage (Voc)	47.60	47.80	48.00	48.20	48.40
Short-circuit Current (Isc)	20.05	20.09	20.13	20.18	20.22

Mechanical Parameters

Solar Cells	N-TYPE Monocrystalline(210mm)	No. of Cells	132 [2 x (11 x 6)]
Module Dimensions	2384*1303*33mm	Weight	38.7kg
Glass	2mm-2mm	J-Box	IP68
Frame	Anodized Aluminium Alloy	Output Cable	4.0mm ² , 1200/1200mm
Connector	Zerun Co.,Ltd / Z4S-abcd Stäubli Electrical connectors AG / PV-KST4-EVO2A/xy, PV-KBT4-EVO2A/xy		

Operating Parameters

Operational Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC (IEC)
Maximum Series Fuse Rating	35A
Bifacility	φPmax=80±5% φIsc=80±5% φVoc=98±2%
Fire Class Rating	Class C

Temperature Ratings

Temperature Coefficient of Pmax	-0.28%/°C
Temperature Coefficient of Voc	-0.23%/°C
Temperature Coefficient of Isc	+0.045%/°C


(Do not connect Fuse in Combiner Box with two or more strings in parallel connection)

Packaging


Pcs per Pallet: 33

Pcs per 40' HC: 594


I-V Curves of PV Module (695W)

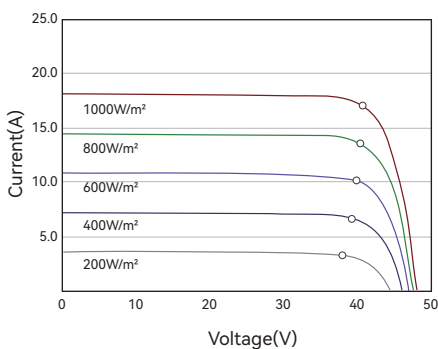


P-V Curves of PV Module (695W)

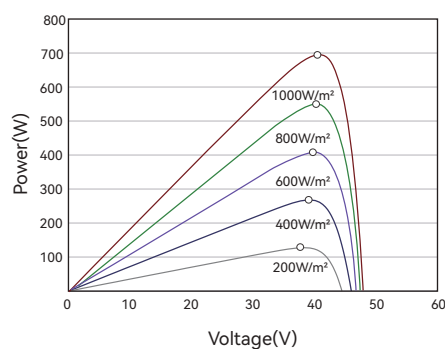

Dimensions (Unit: mm)

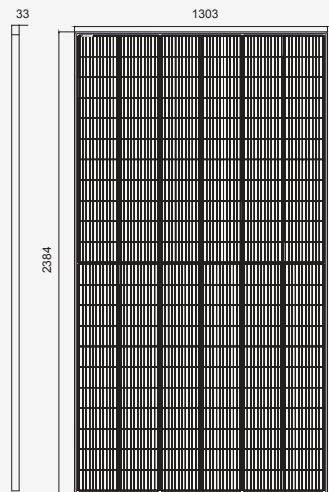

Front View

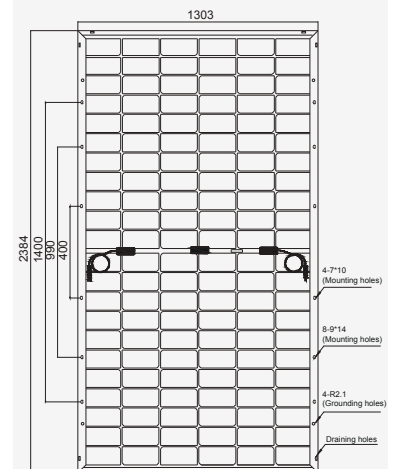

Back View